

LAARS-STOR® SS Stainless Steel Single-Wall Indirect Water Heater



LS-SS-50-L

The LAARS-STOR® SS Models Feature:

- **Stainless Steel Tank and Heat Exchanger**—Made from chromium molybdenum - titanium ferritic 444 stainless steel alloy.
- **Stainless Steel Heat Exchanger**—Single-wall 1" (25mm) O.D. stainless steel coil. Maximum supply temperature from the boiler must not exceed 240°F (116°C).
- **Factory Installed Sediment Reducing Inlet Tube**—Sediment reducing device that also increases first hour rating of hot water while minimizing temperature build-up in tank (excluding LS-SS-120-L).
- **Immersed Adjustable Honeywell Aquastat**—Supplied with a fast acting immersion aquastat for automatic temperature control (adjustable from 80°F to 160°F - 27°C to 71°C).
- **Supply and Return Connections**—1" (25mm) NPT female connections are located on the front for both the boiler supply and boiler return.
- **Insulation System**—2" (51mm) Non-CFC foam insulation covers the sides and top of the tank, reducing heat loss. This results in less energy consumption, improved efficiencies, and jacket rigidity.
- **Potable Water Connections**—3/4" NPT (1" NPT on LS-SS-120-L).
- **T&P Relief Valve**—Included.
- **Low Restrictive Brass Drain Valve**—Durable tamper proof design (excluding the LS-SS-120-L).
- **AHRI Certified**—These water heaters are rated by the Air-Conditioning, Heating, and Refrigeration Institute to provide accurate performance data within the standards of the certification. This certification provides a recognized standard for proper comparison of hydronic appliances.



**Limited Lifetime Tank and Heat Exchanger Warranties / 6-Year Limited Warranty on Component Parts.
5-Year Limited Tank Warranties on Commercial Models/1-Year Limited Warranty of Component parts**

*For products installed in USA, Canada, and Puerto Rico. Some states do not allow limitations on warranties.
See complete copy of the warranty included with the heater.*


LAARS-STOR® SS Stainless Steel Indirect Water Heater

Model Number	Capacity		A Floor to Heater Top	B Jacket Dia.	C Floor to T&P Conn.	D Floor to Hot Water Conn.	E Floor to Cold Water Conn.	F Floor to Exchanger Outlet	G Floor to Exchanger Inlet	H Floor to Aquastat	Approx. Shipping Weight
	U.S. Gal.	Imp. Gal.	in.	in.	in.	in.	in.	in.	in.	in.	lbs.
LS-SS-30-L	29	24	31 ⁵ / ₈	24	22 ¹ / ₂	32 ¹ / ₂	32 ¹ / ₂	10	22 ⁵ / ₈	16 ¹ / ₂	75
LS-SS-40-L	38	31	38 ¹ / ₄	24	29 ¹ / ₈	38 ⁷ / ₈	38 ⁷ / ₈	10	24 ³ / ₄	18 ³ / ₄	91
LS-SS-50-L	50	42	48	24	39 ³ / ₄	48 ⁷ / ₈	48 ⁷ / ₈	10	29 ¹ / ₄	19 ¹ / ₂	103
LS-SS-75-L	73	60	65 ⁵ / ₈	24	56 ¹ / ₂	66 ¹ / ₄	66 ¹ / ₄	10	33 ⁵ / ₈	19 ¹ / ₂	142
LS-SS-120-L	111	92	68 ³ / ₈	30 ¹ / ₄	63 ¹ / ₂	53	2	11	39 ¹ / ₈	30 ¹ / ₂	217

Model Number	Capacity		A Floor to Heater Top	B Jacket Dia.	C Floor to T&P Conn.	D Floor to Hot Water Conn.	E Floor to Cold Water Conn.	F Floor to Exchanger Outlet	G Floor to Exchanger Inlet	H Floor to Aquastat	Approx. Shipping Weight
	Liters		mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	kg.
LS-SS-30-L	110		803	610	572	826	826	254	575	419	34
LS-SS-40-L	142		972	610	740	987	987	254	629	476	41
LS-SS-50-L	189		1219	610	1010	1241	1241	254	743	495	47
LS-SS-75-L	274		1667	610	1435	1683	1683	254	854	495	64
LS-SS-120-L	420		1737	768	1613	1346	51	279	994	775	98

English						Metric					
Model Number	First Hour Delivery Rating	Continuous Draw @135°F	Standby Heat Loss Rating	Minimum Heat Required Rate	Minimum Heat Source Flow Rate	Model Number	First Hour Delivery Rating	Continuous Draw @57°C	Standby Heat Loss Rating	Minimum Heat Required Rate	Minimum Heat Source Flow Rate
	Gal./Hr.	Gal./Hr.	°F/Hr.	BTU/Hr.	Gal./Min.		Liters/Hr.	Liters/Hr.	°C/Hr.	kW/Hr.	Liters/Min.
LS-SS-30-L	179	160	0.8	105,000	14.0	LS-SS-30-L	678	606	0.44	30.8	53.0
LS-SS-40-L	237	209	0.6	135,000	14.0	LS-SS-40-L	897	791	0.33	39.6	53.0
LS-SS-50-L	269	229	0.5	145,000	14.0	LS-SS-50-L	1018	867	0.27	40.5	53.0
LS-SS-75-L	367	307	0.4	193,000	14.0	LS-SS-75-L	1389	1162	0.22	56.6	53.0
LS-SS-120-L	409	319	0.3	199,000	9.0	LS-SS-120-L	1548	1208	0.16	58.3	34.0

NOTE: These certified ratings were obtained with a heat source output and flow rate as specified and a 180°F (82°C) boiler water supply temperature. Other results will be obtained under different conditions.

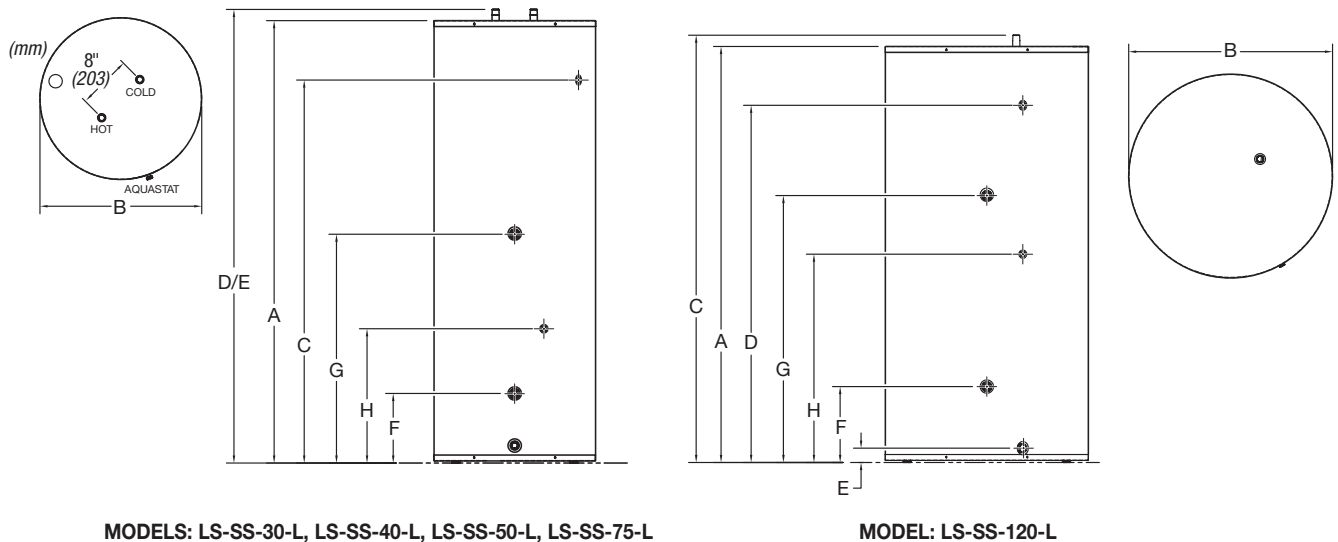

General

All units are certified at 300 PSI (2068 kPa) test pressure and 150 PSI working pressure (1034 kPa). All potable water connections are 3/4" NPT (1" NPT on LS-SS-120).

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

Toxic chemicals, such as those used for boiler treatment, shall NEVER be introduced into the potable water side. The potable side of this unit may NEVER be connected to any existing heating system or component(s) previously used with a non-potable water heating appliance. The heat exchanger side of the unit may be used in space heating applications.